



07 January 2026

Subject: Distributorship

To whom it may concern:

CAT PUMPS is pleased to confirm that **High Pressure Pumps S.A.S.** is an Authorized Distributor of Cat Pumps and provides full sales and service of our products in Colombia.

Sincerely,

A handwritten signature in blue ink, which appears to read "Paul Bradik", is located below the word "Sincerely,".

Paul Bradik
International Sales Coordinator


LIQUID CO₂ PLUNGER PUMPS



DISTRIBUIDOR AUTORIZADO PARA COLOMBIA

For over 25 years, Cat Pumps has provided dependable liquid carbon dioxide (CO₂) pumping solutions, working closely with research facilities, universities, and equipment manufacturers to develop reliable solutions in challenging CO₂ applications.

In addition to providing the most reliable high-pressure pump available in the marketplace, Cat Pumps also has a dedicated and knowledgeable customer service team that will help in the selection and troubleshooting of liquid CO₂ pumping applications.

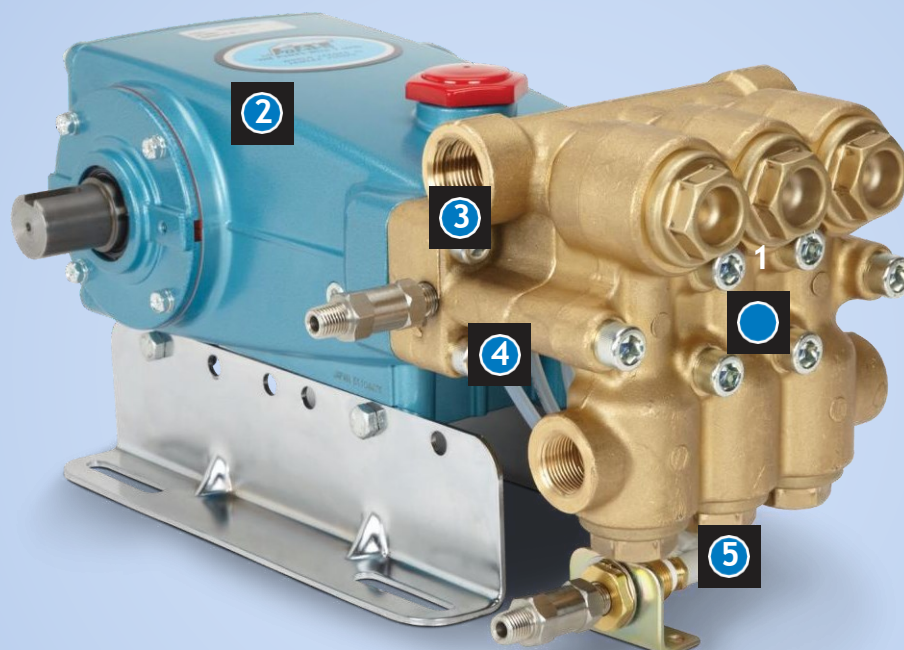

0.34–50 GPM | 400–7,000 PSI

CO₂ Pump Features:

- 1 Inverted manifold provides improved passage for trapped vapor bubbles to escape through the inlet and return to the tank, avoiding potential issues caused by bubbles in the discharge line. Special formulated seals allow for improved operation with the low temperature and low lubricity properties of CO₂.
- 2 Drive-end contains upgraded materials and component design to accommodate the high inlet pressures required to maintain CO₂ in a liquid state.

- 3 Flush manifold offers protection from damage caused by CO₂ leaking past the high pressure seal. Included check valve prevents ambient air from entering pump manifold. Port can also be used for an optional glycol flush for added protection from freezing.*
- 4 Vented seal retainers offer secondary protection against any CO₂ that escapes past the low pressure seal, preventing damage to the drive-end or pump manifold.*

- 5 Seal retainer manifold and check valve allow the escape of vapor while excluding air and humidity from entering, which can result in ice build-up.*

* Flush and vented seal retainers only required on 8 frame and larger pumps.

MAYOR INFORMACIÓN AL 3204758874 – 302 2971431
comercial@highpresspumps.com.co

INDUSTRIAL DUTY PUMPS FOR LIQUID CO₂ APPLICATIONS

Cat Pumps liquid CO₂ series of pumps feature modifications to accommodate the unique properties of liquid CO₂. Specialty seals are used to handle low lubricity and low temperature that liquid CO₂ applications require. Pump manifolds are modified to allow higher inlet pressures and discharge pressures up to 7,000 psi (483 bar). Drive-end and manifold material combinations are available to cover a wide flow range from 0.34 to 50 gpm (189 to 27,800 lbs/hr).

Cat Pumps offers full technical and engineering support to properly select pumps for the specific application. Pumps are available in brass and 316 stainless steel. Cat Pumps has provided liquid CO₂ pumping solutions for over 25 years, working closely with research facilities, universities, equipment manufacturers and site locations to design and provide the best solutions.

Please contact Cat Pumps Technical Sales Team for assistance designing a Liquid CO₂ pump to meet your application needs.

Model	Manifold Material	Flow*				Pressure*	
		(gpm)	(lpm)	(kg/hr)	(lbs/hr)	(psi)	(bar)
784MCO ₂	316SS	0.34	1.3	81	189	5000	345
30.CO ₂	Brass	0.68	2.6	162	378	2200	152
301.CO ₂	316SS	0.68	2.6	162	378	2150	148
781KMCO ₂	316SS	0.82	3.1	196	456	5000	345
351.CO ₂	316SS	1.22	4.6	295	649	1500	103
5CP2921	316SS	1.7	6.5	406	945	2500	172
310.CO ₂	Brass	1.75	6.7	418	973	2200	152
1560MCO ₂	Brass	2.5	9.5	624	1372	4000	276
3507CMCO ₂	NAB	3.5	14.4	890	1958	5000	345
3801KMCO ₂	316SS	3.5	14.4	836	1946	5000	345
1051CMCO ₂	316SS	4.0	15.2	955	2224	2200	152
1050MCO ₂	Brass	4.0	15.2	955	2224	2200	152
1530RSCMCO ₂	Brass	5.0	19.0	1194	2780	1800	124
6801KMCO ₂	316SS	6.5	24.7	1676	3687	7000	483
1540ECMCO ₂	Brass	7.0	26.6	1670	3674	1200	83
6811KMCO ₂	316SS	7.2	27.4	1719	4003	5000	345
2831KMCO ₂	316SS	10.0	38.0	2388	5560	1200	83
3520CMCO ₂	Brass	11.4	43.3	2722	6338	2000	138
6821KMCO ₂	316SS	16.0	60.8	3821	8896	3000	207
3535CMCO ₂	Brass	19.4	73.7	4633	10786	1200	83
3831KMCO ₂	316SS	19.4	73.7	4633	10786	1200	83
6841KMCO ₂	316SS	30.0	114	7164	16680	2000	138
6861KMCO ₂	316SS	50.0	228	11940	27800	1200	83

* Flow and pressure may vary based on inlet/temp. conditions. Custom flows and pressures available upon request.





Mayor información

CEL. 3204758874-3022971431

www.highpresspumps.com.co

comercial@highpresspumps.com.co

**DISTRIBUIDOR
CERTIFICADO PARA
COLOMBIA**

